




## ELECTRICALLY & THERMALLY CONDUCTIVE ADHESIVES & COATINGS

Technical Bulletin A8-S1


Aremco offers a broad range of electrically and thermally conductive adhesives & coatings that provide solutions to a variety of electrical, electronics and thermal design problems throughout industry.

### PRODUCT HIGHLIGHTS


Part Number	Adhesive/Coating	Filler	Conductivity		Max Temp °F (°C)
			Electrical	Thermal	
525-N	Adhesive	Silver	✓	✓	340 (170)
556	Adhesive	Silver	✓	✓	340 (170)
556-LV	Adhesive	Silver	✓	✓	340 (170)
556-HT-HC	Adhesive	Silver	✓	✓	390 (200)
556-HT-UHC	Adhesive	Silver	✓	✓	390 (200)
556-HT-SP	Adhesive	Silver	✓	✓	445 (230)
568	Adhesive	Aluminum		✓	400 (204)
597-A	Adhesive	Silver	✓	✓	1700 (927)
597-C	Coating	Silver	✓	✓	1700 (927)
598-A	Adhesive	Nickel	✓	✓	1000 (538)
598-C	Coating	Nickel	✓	✓	1000 (538)
614	Adhesive	Nickel	✓	✓	360 (180)
616	Adhesive	Silver	✓	✓	360 (180)
805	Adhesive	Aluminum		✓	572 (300)
860	Adhesive	Aluminum Nitride		✓	400 (204)

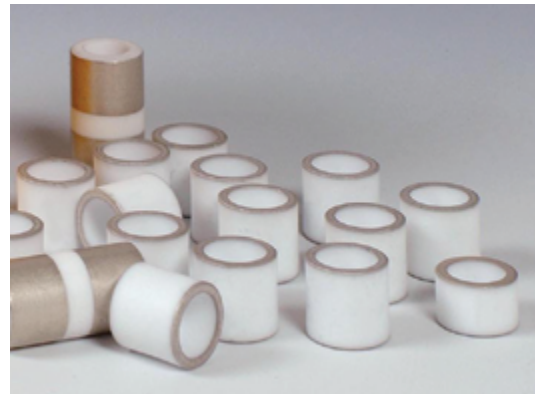

Pyro-Duct™ 597-C metallizes ceramic tubes.

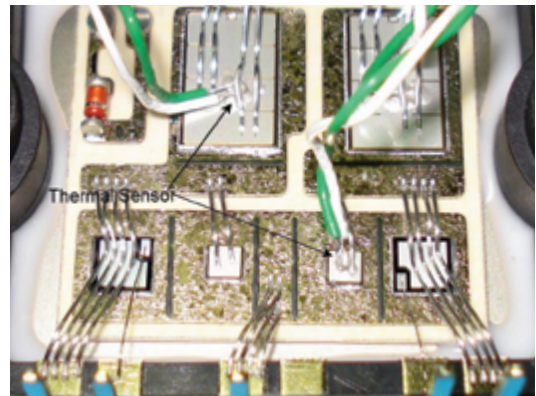

Aremco-Bond™ 556-HT-SP used to bond thermal sensor.

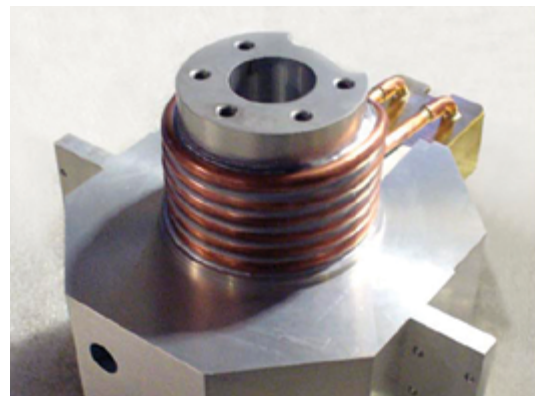

Aremco-Bond™ 568 bonds copper heat exchange tube to aluminum.



# ELECTRICALLY & THERMALLY CONDUCTIVE ADHESIVES & COATINGS

Properties	ADHESIVES													COATINGS	
Product Number	525-N	556	556-LV	556-HT-UHC	556-HT-HC	556-HT-SP	597-A	598-A	568 <sup>3</sup>	614	616	805	860 <sup>3</sup>	597-C	598-C
<b>Resin type</b>	Epoxy						Ceramic			Epoxy				Silicone	Ceramic
<b>Filler</b>	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Silver Flake	Nickel Flake	Aluminum	Nickel Flake	Silver-Coated Glass	Aluminum	Aluminum Nitride	Silver Flake	Nickel Flake
<b>Particle Size, microns</b>	< 28	< 20	< 20	< 20	< 20	< 44	< 20	< 20	< 20	< 20	< 130	< 50	< 10	< 20	< 20
<b>No. Components</b>	1	2	2	2	2	2	1	1	2	2	2	2	2	1	1
<b>Mix Ratio, by Weight, resin:hardener</b>	NA	1:1	100:4	100:2	100:2	1:1	NA	N/A	1:1	1:1	1:1	100:12	1:1	NA	NA
<b>Mixed Specific Gravity, g/cc @ 25 °C</b>	1.85	3.2	2.9	3.7	3.1	3.1	2.3	2.8	0.85	1.8	1.53	1.66	1.90	2	1.5
<b>Mixed Viscosity, cP @ 25 °C</b>	Paste	35,000–40,000	4,000–6,000	40,000–50,000	40,000–45,000	35,000–45,000	Paste	20,000–25,000	Paste	100,000–110,000	50,000–60,000	11,000	40,000	400–800	400–600
<b>Pot Life, 25 gms @ 25 °C</b>	NA	1 Hr	1 Hr	> 48 Hrs	48 Hrs	> 48 Hrs	NA	N/A	4.0 Hr	0.75 Hr	0.75 Hr	< 1.0 Hr	4.0 Hr	NA	NA
<b>Recommend Cure, hr/°F</b>	2/300	2/200	2/200	2/175	2/200	1/350	2/RT + 2/200	2/RT + 2/200	2/200	2/100	2/100	24/100 + 2/200	2/200	1/RT + .5/480	2/RT + 2/200
<b>Alternate Cure, hr/°F</b>	6/250	24/RT	24/RT	0.5/250 or 0.25/300	1/250	2/300	—	—	24–48/RT	1/200 or 8/RT	1/200 or 8/RT	24/RT + 2/200	24–48/RT	—	—
<b>Service Temperature, °F (°C) Continuous Intermittent</b>	340 (170) 375 (190)	340 (170) 375 (190)	340 (170) 375 (190)	390 (200) 480 (250)	390 (200) 480 (250)	445 (230) 570 (300)	1700 (927) —	1000 (538) —	400 (204) —	360 (180) 400 (205)	360 (180) 400 (205)	572 (300) —	400 (204) —	1700 (927) —	1000 (538) —
<b>Volume Resistivity, ohm-cm</b>	0.006	0.0009	0.0008	< 0.0003	< 0.0001	< 0.0004	0.0002	0.005	1.0 × 10 <sup>5</sup>	0.025	0.002–0.004	1.0 × 10 <sup>5</sup>	1.0 × 10 <sup>15</sup>	0.0002	0.005
<b>Tensile Shear Strength, psi<sup>2</sup></b>	2,500	1,700	1,100	> 1,000	1,700	1,400	—	—	2,500	2,500	1,000	1,800	1,375	—	—
<b>Thermal Conductivity, W/m-K</b>	2.1	2.2	2.2	12.4	2.2	3.5	9.1	2.6	9.0	0.5	0.4	12.5	8.5	9.1	2.6
<b>Hardness, Shore D</b>	76	72	84	90	90	88	—	—	75	78	78	87	75	—	—
<b>Color</b>	Silver	Silver	Silver	Silver	Silver	Silver	Silver	Dark Gray	Gray	Dark Gray	Tan	Gray	Gray	Silver	Dark Gray
<b>Shelf Life, months</b>	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6

**Reference Notes**

<sup>1</sup> The low end of the service temperature range for all products is approximately -67 °F (-55 °C).

<sup>2</sup> Tested according to ASTM D1002-94 at 25 °C, a method for determining the shear strength of a single lap-joint of metal substrates in tensile loading.

<sup>3</sup> Available as a faster-setting. Add “-FSLV” (eg. 568-FSLV).

**Application Notes**

**Surface Preparation:** All surfaces must be free of oil, grease, dirt, corrosives, oxides, paint or other foreign matter. Sand blast or abrade non-porous surfaces, or etch using Aremco's Corr-Prep™ CPR2000.

**Mixing:** Two component products should be mixed thoroughly prior to dispensing. For high viscosity systems each component can be preheated separately at 100–125 °F to facility mixing and dispensing. Aremco-Bond™ 568 is available in 50ml cartridges. Order 568-C 50ml Cartridge, 9910 6” Mixing Nozzle and 9850 Plunger or 9700 Mechanical Dispense Gun.

**Application:** Apply adhesive to both surfaces maintaining a glue line of less than 10 mils. Assemble parts and apply pressure to prevent warpage and reduce air entrapment. Refer to curing guidelines in above property chart.

**Abbreviations**

NA Not Applicable  
 RT Room Temperature

