



## Advanced Materials

# Araldite® F300 / Hardener Lacquer 2

### Araldite® Structural Adhesives

## Araldite® F300 / Hardener Lacquer 2 “No-mix” methacrylate adhesive system

### Key properties

- Hardener can be applied to substrate and stored for up to 30 days
- Very rapid cure after joining, 5 minutes handling strength
- High shear strength and peel strength
- Bonds well to a wide range of metals and plastic materials
- Good thermal stability and moisture resistance

### Description

Araldite® F300 / Hardener Lacquer 2 is a “No-mix” room temperature curing, methacrylate adhesive suitable for bonding metals and plastics. Its high setting rate at room temperature allows handling of the bonded parts within a very short time. The adhesive has an assembly time of 1 – 2 minutes. As early as 5 minutes after joining (curing at room temperature), the parts can be handled. The final strength is attained within 24 hours.

Bonds produced with Araldite® F300 show good tensile shear and peel strengths as well as good thermal stability between -40°C and +130°C.

### Product data

Properties	Araldite® F300	Hardener Lacquer 2
Colour (visual)	Grey/Beige	Pale yellow liquid
Specific gravity	ca 1.2	-
Viscosity (Pas)	ca. 20	Low
Gelation time (mins) at 23°C	ca. 2 minutes after parts are in contact	

### Processing

#### Pretreatment

The strength and durability of a bonded joint are dependant on proper pretreatment of the surfaces to be bonded, however the methacrylate adhesives can be used effectively with little surface preparation.

Ideally joint surfaces should be cleaned with a good degreasing agent such as acetone, iso-propanol or proprietary degreasing agent in order to remove all traces of oil, grease and dirt. Low grade alcohol, gasoline (petrol) or paint thinners should never be used.

The strongest and most durable joints are obtained by either mechanically abrading or chemically etching (“pickling”) the degreased surfaces.

#### Application of adhesive

Depending on the type of application, the hardener lacquer can be applied by spraying, brushing, roll-coating or dipping one or both surfaces to be bonded.

The lacquer dries sufficiently in about 4 minutes to allow bonding, transporting or storage. Surfaces coated with Hardener Lacquer 2 can be stored for several weeks without losing the hardener’s reactivity.

Once the Hardener Lacquer 2 has dried, the adhesive is applied to one of the two surfaces. Then the parts are joined immediately and fixed under contact pressure. Polymerisation starts as soon as the adhesive touches the Hardener Lacquer 2. The bond can be carefully handled after the time indicated overleaf to reach to lap shear strength of 1N/mm<sup>2</sup>.



A layer of adhesive 0.15 to 0.25 mm thick will normally impart the greatest lap shear strength to a joint, although joints of up to 0.8mm gap can be assembled. For joint gap widths up to 0.4 mm, application of hardener lacquer to just one surface is sufficient. To bridge wider joint gaps, hardener lacquer must be applied to both parts. Gaps wider than 0.8 mm should be avoided since the adhesive may not fully cure.

The joint components should be assembled and clamped as soon as the adhesive has been applied. An even contact pressure throughout the joint area will ensure optimum cure.

If adhesive is applied to one surface and hardener lacquer to the other, this method of separate processing allows bonding operations practically independent of the pot life.

**Mechanical processing**

Specialist firms have developed metering, spraying and spreading equipment that enables the bulk processing of adhesive. We will be pleased to advise customers on the choice of equipment for their particular needs.

**Equipment maintenance**

All tools should be cleaned before adhesives residues have had time to cure. The removal of cured residues is a difficult and time-consuming operation.

If solvents such as acetone are used for cleaning, operatives should take the appropriate precautions and, in addition, avoid skin and eye contact.

**Curing speed**

Temperature	°C	10	15	23	40
Cure time to reach	hours	-	-	-	-
LSS > 1N/mm <sup>2</sup>	minutes	5	4	3	2
Cure time to reach	hours	-	-	-	-
LSS > 10N/mm <sup>2</sup>	minutes	7	7	6	4

LSS = Lap shear strength.

**Typical cured properties**


Unless otherwise stated, the figures given below were all determined by testing standard specimens made by lap-jointing 170 x 25 x 1.5 mm strips of aluminium alloy. The joint area was 12.5 x 25 mm in each case.

The figures were determined with typical production batches using standard testing methods. They are provided solely as technical information and do not constitute a product specification.

**Average lap shear strengths of typical metal-to-metal joints (ISO 4587)**

Cured for 7 days at 23oC and tested at 23°C

Pretreatment - Sand blasting

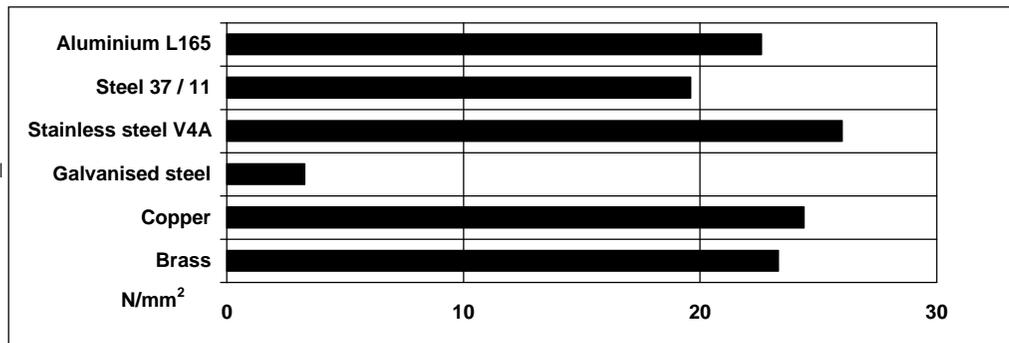




**Average lap shear strengths of typical plastic-to-plastic joints (ISO 4587)**


Cured for 7 days at 23 °C and tested at 23°C

Pretreatment - Lightly abrade and isopropanol degrease. Note - failure modes are mainly substrate failure

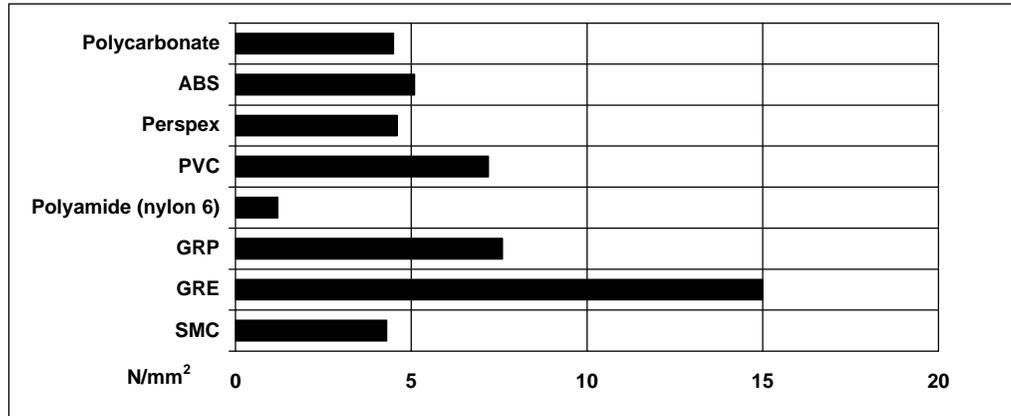

**Lap shear strength versus temperature (ISO 4587) (typical average values)**

Cure: = 7 days at 23°C

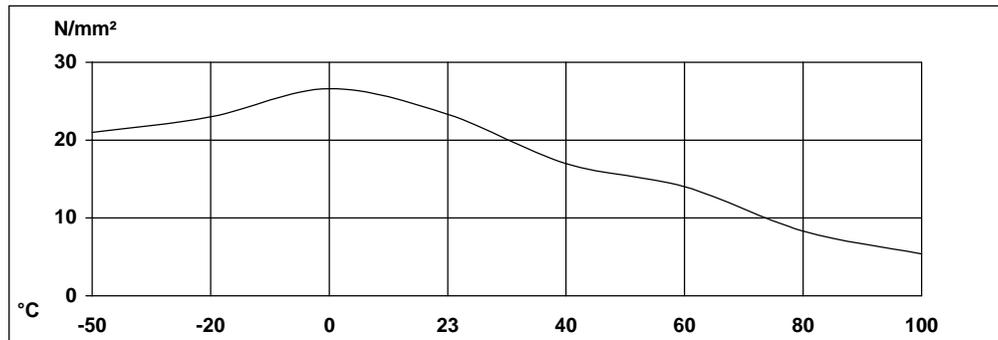

**Roller peel test (ISO 4578) at 23°C**

6 N/mm

**Glass Transition Temperature (T<sub>g</sub>)**

No clear transition – refer to LSS/temp. and G'/temp

**Tensile strength ISO R527 type 1**

26 MPa

**Elongation at break:**

7.2 %


**Coefficient of thermal expansion (-30°C/+30°C)**

70 x 10<sup>-6</sup>/°K (Cured 7 days at 23°C)




**Lap shear strength versus immersion in various media at 23°C (typical average values)**

Substrate – gritblasted aluminium

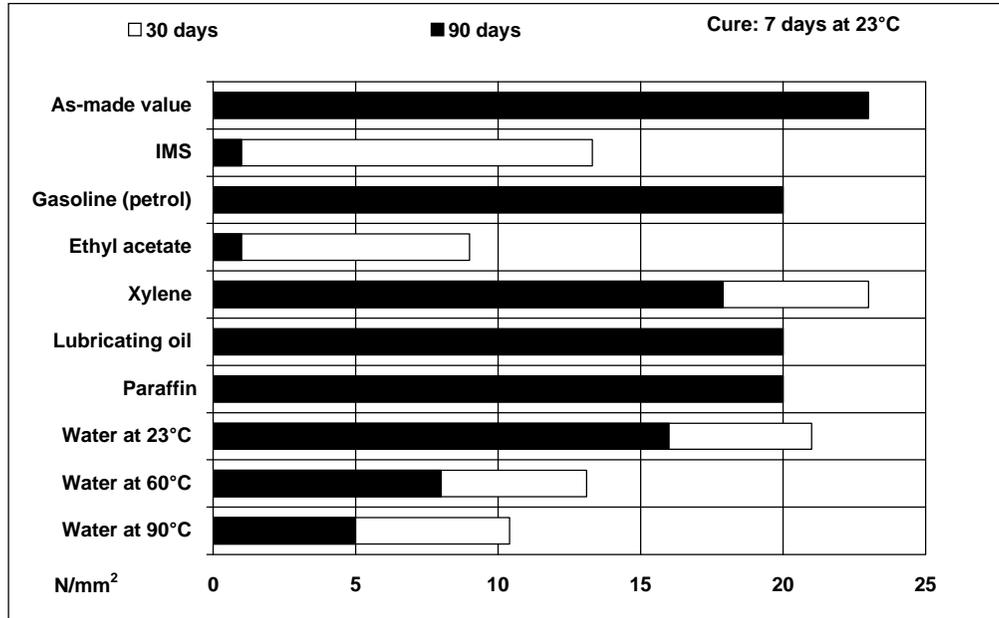

**Lap shear strength versus tropical weathering (40/92, DIN 50015; typical average values)**

Cure: 7 days at 23°C

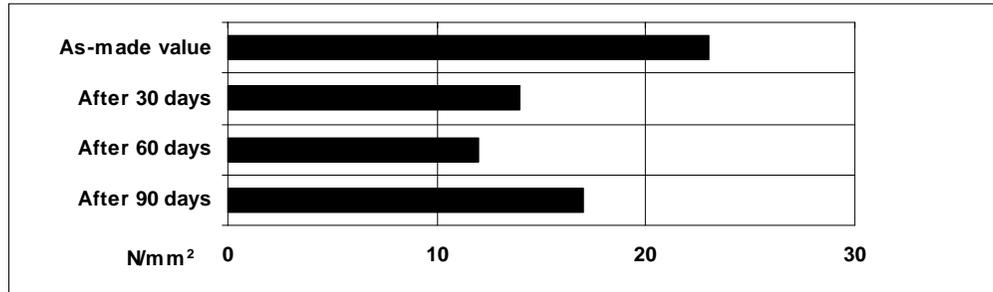

**Shear modulus (DIN 53345)**

cured 7 days at 23 °C

Temperature	G' modulus	^ (Tan delta)
-40°C	2 GPa	3.45 E-2
-20°C	1.7 GPa	5.24 E-2
0°C	1.4 GPa	7.25 E-2
20°C	1.05 GPa	9.84 E-2
40°C	0.75 GPa	1.2 E-1
60°C	0.45 GPa	1.7 E-1
80°C	0.15 GPa	3.4 E-1
100°C	50 MPa	4.9 E-1
120°C	12 MPa	4.5 E-1



---

**Storage**

Araldite® F300 and Hardener Lacquer 2 may be stored for up to 36 months at 2-8°C provided the components are stored in sealed containers. When stored at 23°C the life is a maximum of 6 months. The expiry date, assuming 2-8°C storage is indicated on the packaging.

---

**Handling  
Precautions****Caution**

Our products are generally quite harmless to handle provided that certain precautions normally taken when handling chemicals are observed. The uncured materials must not, for instance, be allowed to come into contact with food-stuffs or food utensils, and measures should be taken to prevent the uncured materials from coming in contact with the skin, since people with particularly sensitive skin may be affected. The wearing of impervious rubber or plastic gloves will normally be necessary; likewise the use of eye protection. The skin should be thoroughly cleansed at the end of each working period by washing with soap and warm water. The use of solvents is to be avoided. Disposable paper - not cloth towels - should be used to dry the skin. Adequate ventilation of the working area is recommended. These precautions are described in greater detail in the Material Safety Data sheets for the individual products and should be referred to for fuller information.

Huntsman Advanced Materials warrants only that its products meet the specifications agreed with the buyer. Typical properties, where stated, are to be considered as representative of current production and should not be treated as specifications.

The manufacture of materials is the subject of granted patents and patent applications; freedom to operate patented processes is not implied by this publication.

While all the information and recommendations in this publication are, to the best of our knowledge, information and belief, accurate at the date of publication, NOTHING HEREIN IS TO BE CONSTRUED AS A WARRANTY, EXPRESS OR OTHERWISE.

IN ALL CASES, IT IS THE RESPONSIBILITY OF THE USER TO DETERMINE THE APPLICABILITY OF SUCH INFORMATION AND RECOMMENDATIONS AND THE SUITABILITY OF ANY PRODUCT FOR ITS OWN PARTICULAR PURPOSE.

The behaviour of the products referred to in this publication in manufacturing processes and their suitability in any given end-use environment are dependent upon various conditions such as chemical compatibility, temperature, and other variables, which are not known to Huntsman Advanced Materials. It is the responsibility of the user to evaluate the manufacturing circumstances and the final product under actual end-use requirements and to adequately advise and warn purchasers and users thereof.

Products may be toxic and require special precautions in handling. The user should obtain Safety Data Sheets from Huntsman Advanced Materials containing detailed information on toxicity, together with proper shipping, handling and storage procedures, and should comply with all applicable safety and environmental standards.

Hazards, toxicity and behaviour of the products may differ when used with other materials and are dependent on manufacturing circumstances or other processes. Such hazards, toxicity and behaviour should be determined by the user and made known to handlers, processors and end users.

Except where explicitly agreed otherwise, the sale of products referred to in this publication is subject to the general terms and conditions of sale of Huntsman Advanced Materials LLC or of its affiliated companies including without limitation, Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., and Huntsman Advanced Materials (Hong Kong) Ltd.

Huntsman Advanced Materials is an international business unit of Huntsman Corporation. Huntsman Advanced Materials trades through Huntsman affiliated companies in different countries including but not limited to Huntsman Advanced Materials LLC in the USA and Huntsman Advanced Materials (Europe) BVBA in Europe.

Araldite is a registered trademark of Huntsman Corporation or an affiliate thereof.

Copyright © 2008 Huntsman Corporation or an affiliate thereof. All rights reserved.